

## External wall sliding doors – on-sight slidings

### ABSOLUTE sliding

Henry glass on sight sliding. The ABSOLUTE sliding doors for single or biparting doors are produced in tempered safety glass, also stratified.

The glass is placed in front of the oval-shaped track and the carriages are directly attached to the glass.

The distance from the glass to the wall is only 18 mm.

They are supplied only with VITRA line.




### VISION sliding

Traditional on sight sliding. The VISION sliding doors for single or biparting doors are produced in tempered safety glass, also stratified.

The Vision sliding system consists of a round cross

section tube in stainless steel. The carriages are anchored to the glass by stainless steel bars.

They are supplied only with VITRA line.

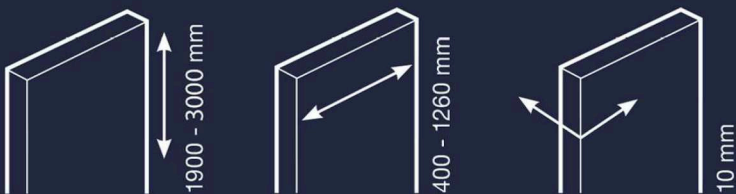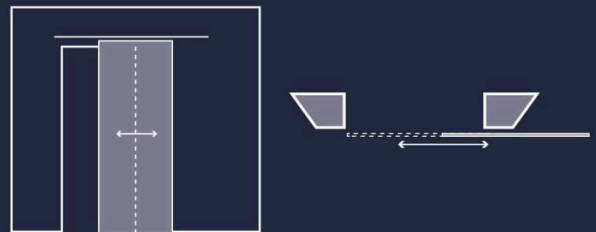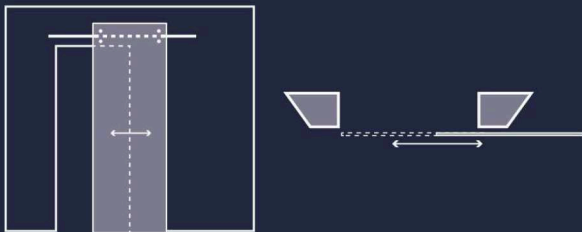

**Dimensions on demand.** The doors can be customized with a maximum width of 1260 mm and a maximum height of 3000 mm. Glass thickness 10 mm (tempered monolithic or tempered stratified).

EXTERNAL WALL SLIDING DOOR - VISION AND ABSOLUTE SLIDING	
DOOR	<p><b>Door width:</b> from 400 mm to 1260 mm</p> <p><b>Door height:</b> from 1900 mm to 3000 mm (for different dimensions please contact our offices)</p>
ABSOLUTE SLIDING	<p><b>Lenght of the track:</b> maximum 5000 mm (in one piece)</p>
VISION SLIDING	<p><b>Lenght of the track:</b> maximum 5000 mm (in one piece)</p>