


Swing doors

Henry glass swing doors, custom-made in safety tempered glass, also stratified, represent original, elegant and technical solutions with an opening angle up to 180°.

An elegant aluminum profile, patented by Henry glass, serves as the hinge and obviates the need for supporting frames and traditional patch hinges which spoil the beauty of the "Tuttovetro" doors.

Doors are available with polished edge or with a lateral profile; profiles and accessories are available in different finishes.

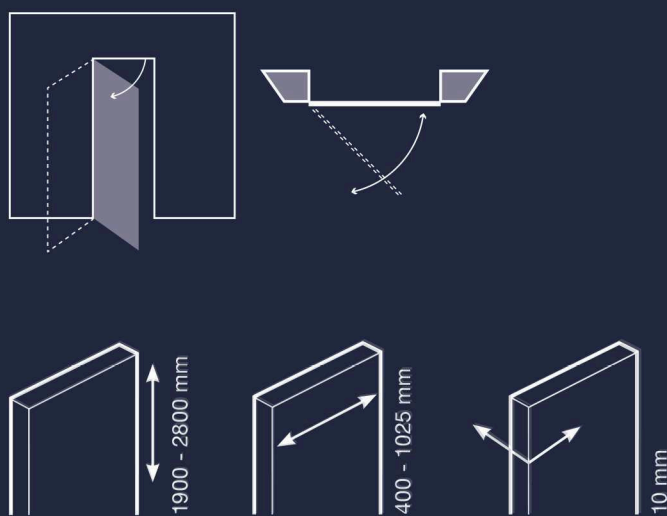

Dimensions on demand. The doors can be customized with a maximum width of 1025 mm and a maximum height of 2800 mm. Glass thickness 10 mm (tempered monolithic or tempered stratified).

SWING DOOR		
DOOR	<p>Door width: from 400 mm to 1025 mm Door height: from 1900 mm to 2800 mm (for different dimensions please contact our offices)</p>	
FRAMES	FLY	<p>External frame width: maximum 2120 mm External frame height: maximum 2840 mm Wall thickness: from 68 mm to 325 mm</p>
	XILO	<p>External frame width: maximum 2160 mm External frame height: maximum 2850 mm Wall thickness: from 90 mm to 400 mm</p>
	ISY	<p>Finished opening width: maximum 2150 mm Finished opening height: maximum 2850 mm Wall thickness: any thickness</p>
	PLAIN	<p>Finished opening width: maximum 2150 mm Finished opening height: maximum 2850 mm Wall thickness: any thickness</p>