


Double opening doors

The doors are custom-made in safety tempered glass, also stratified, and allow both sides to open with an automatic closing system. They are characterized by the oil-dynamic hinge with adjustment of the closing speed of the door: stop at 0° +90° -90°.

The doors can be supplied with a variety of different accessories.

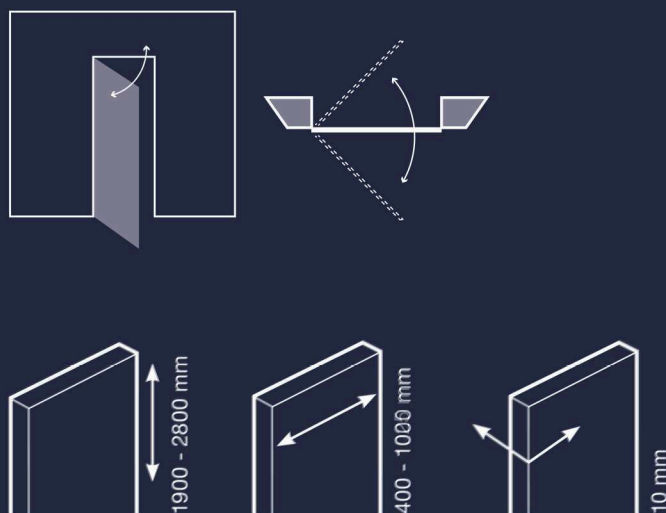

Dimensions on demand. The doors can be customized with a maximum width of 1000 mm a maximum height of 2800 mm. Glass thickness 10 mm (tempered monolithic or tempered stratified).

DOUBLE OPENING DOOR		
DOOR	<p>Door width: from 400 mm to 1025 mm Door height: from 1900 mm to 2800 mm (for different dimensions please contact our offices)</p>	
FRAMES	FLY	<p>External frame width: maximum 2120 mm External frame height: maximum 2840 mm Wall thickness: from 68 mm to 325 mm</p>
	XILO	<p>External frame width: maximum 2160 mm External frame height: maximum 2850 mm Wall thickness: from 90 mm to 400 mm</p>